

[Home](#)

[ABOUT US](#)

[STAFF](#)

[FIND US](#)

www.premier-solutions.biz

Futurelight

FUTURELIGHT PHS-250 Moving Head Spot



NEW

[56k Video](#)

[ISDN Video](#)

[DSL Video](#)

*** * * * DMX * * * ***

Professional Moving-Head

- **Versatile Moving-Head with a wide range of illumination and decoration possibilities**
 - **8 brilliant, dichroic colours plus white**
 - **Gobo-wheel 1 with 6 rotating metal gobos plus open**
 - **Gobo-wheel 2 with 7 static metal gobos plus open**

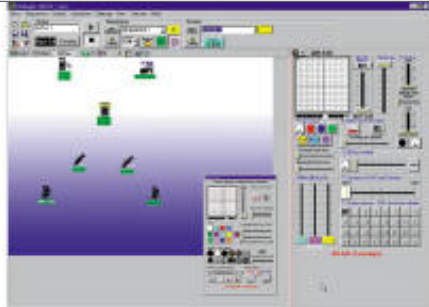


- **Motorized focus**
- **Strobe-effect with 1-13 flashes per second**
- **Rotating 3-facet prism**
- **Mechanic dimmer**
- **Exact positioning within 630° Pan and 265° Tilt**
- **14 DMX-channels - 16 bit Pan/Tilt movement resolution**
- **12 DMX-channels - 8 bit Pan/Tilt movement resolution**
 - **4-digit LED display for starting address**
- **For MSD/HSD 230 V/250 W GY-9.5 or MSD/HSD 230 V/200 W GY-9.5 lamp**
- **DMX-control via every standard DMX-controller**
- **Suitable FUTURELIGHT controllers: CP-256 controller**

PHS-250

TECHNICAL SPECIFICATIONS:

| | |
|---|-----------------------------|
| Power supply: | 230 V/50 Hz |
| Power consumption: | 430 W |
| DMX-control-channels: | 12/14 |
| DMX-512-connection: | 3-pin XLR |
| Flash-rate: | 13 Hz |
| Colour-wheel: | 8 dichroic filters and open |
| Rotating gobo-wheel: | 6 gobos and open |
| Static gobo-wheel: | 7 gobos and open |
| Outside diameter of the gobos: | 27 mm |
| Image diameter of the gobos: | 23 mm |
| Length of base: | 400 mm |
| Width of yoke: | 390 mm |
| Height (head horizontal): | 520 mm |
| Weight (net): | 21 kg |
| Fitting lamps: | |
| OMNILUX OSD 70V/200W GY-9,5 2000h 6700K | No. 89102005 |
| OSRAM HSD 70V/200W GY-9,5 2000h | No. 89102010 |
| PHILIPS MSD 70V/200W GY-9,5 2000h | No. 89102015 |
| SYLVANIA 70V/200W GY-9,5 2000h | No. 89102020 |
| OMNILUX OSD 90V/250W GX-9,5 2000h 6700K | No. 89106005 |
| OSRAM HSD250 90V/250W GY-9,5 2000h | No. 89106010 |
| SYLVANIA BA250/2 SE D 90V/250W GY-9,5 | No. 89106120 |
| PHILIPS MSD250 90V/250W GY-9,5 2000h | No. 89106015 |
| OSRAM HSD250/2 90V/250W GY9,5 3000h 7800K | No. 89106110 |
| PHILIPS MSD250/2 90V/250W GY-9,5 2000h | No. 89106115 |
| Recommended controllers: | |
| FUTURELIGHT CP-256 controller | No. 51834285 |
| Wizard-512 DMX-Software + Interface | No. 51860101 |
| Wizard-1024 DMX-Software + Interface | No. 51860110 |
| PHS-250 Part Number: 51838175 | |

Recommended Associated Equipment

| | |
|--|---|
|  | Futurelight Wizard 512 Computer Software |
|  | Futurelight CP-256 Programmable DMX Controller |
|  | <u>NJD Merlin 256 Channel DMX Programmable Controller</u> |

[PHS-250](#)
[USER GUIDE](#)
[DOWNLOAD](#)

[7](#) [Back to "FUTURELIGHT INDEX"](#)



download from [here](#)